



Product Build-up


Herculan PU 145/PU 100W (Solvent Free) Top coat

Long lasting, wear resistant, hygienic layer for optimum slide and slip resistance (Line marking paints to mark the field events)



Herculan EG 120 pore filler

Pore filler used to seal the rubber mat

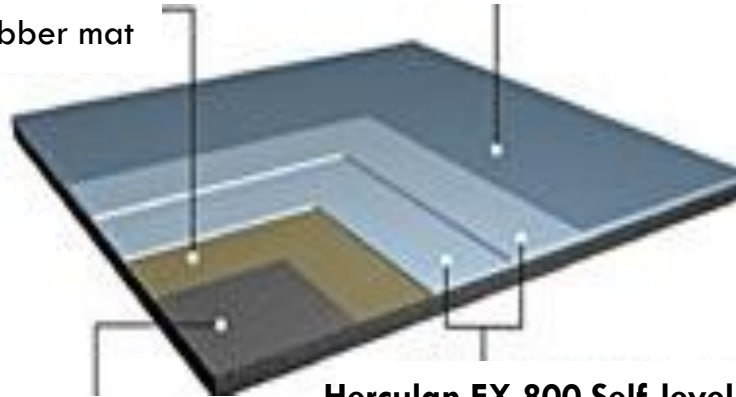

Herculan PU bonded rubber mat

PU bonded rubber mat fully glued to the sub floor with Herculan UN 700

Herculan EX 800 Self levelling layer (2 mm)

Self levelling layer applied in two flow coats for superior and mechanical properties